


Réduction hexagonal laiton femelle x mâle

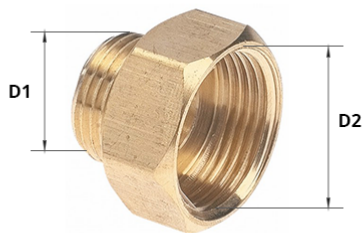

Réduction hexagonal laiton femelle x mâle

Matière : Laiton

Utilisation : Plomberie générale, chauffage, climatisation.

Limites de température : 0°C à +90°C.

Code	Référence	D1	D2	Poids
MALEXFEM				
001313	246L 1/4X1/8	MALE 1/8	FEM 1/4	0.01
018273	246L 1/2X1/4	MALE 1/4	FEM 1/2	0.03
018274	246L 1/2X3/8	MALE 3/8	FEM 1/2	0.029
018275	246L 3/4X3/8	MALE 3/8	FEM 3/4	0.039
018276	246L 3/4X1/2	MALE 1/2	FEM 3/4	0.042
018277	246L 1"X1/2	MALE 1/2	FEM 1"	0.06
018278	246L 1"X3/4	MALE 3/4	FEM 1"	0.069
018279	246L 1"1/4X3/4	MALE 3/4	FEM 1"1/4	0.106
018280	246L 1"1/4X1"	MALE 1"	FEM 1"1/4	0.113
036170	246L 1"1/2X3/4	MALE 3/4	FEM 1"1/2	0.132
036171	246L 1"1/2X1"	MALE 1"	FEM 1"1/2	0.162
018282	246L 1"1/2X1"1/4	FEM 1"1/4	MALE 1"1/2	0.14
036172	246L 2"X1"	MALE 1"	FEM 2"	0.313
036173	246L 2"X1"1/4	MALE 1"1/4	FEM 2"	0.31
036174	246L 2"X1"1/2	MALE 1"1/2	FEM 2"	0.31