


Embout à sertir 45° à bride 6000 PSI

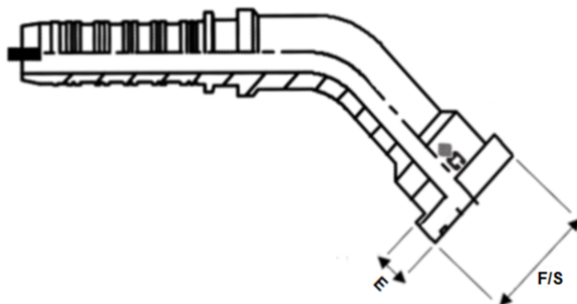

SFS - COLLET SAE 6000 PSI

Matière: Acier

Montage: Avec ou sans dénudage

Norme: SAE J518 - serie 6000 psi

Code	Référence	Diamètre tuyau (mm)	Diamètre tuyau (pouce)	F (Filetage)	H (mm)	S (mm)	E (mm)	Poids
109918	S R 16 CF 1" 45°	16	5/8"	1"				0.273
011805	S R 13 CF 1/2 45°	13	1/2"	1/2"		31.8mm	7.8mm	0.112
011808	S R 13 CF 3/4 45°	13	1/2"	3/4"		41.3mm	8.8mm	0.182
011977	S R 16 CF 1/2 45°	16	5/8"	1/2"		31.8mm	7.8mm	0.135
011980	S R 16 CF 3/4 45°	16	5/8"	3/4"		41.3mm	8.8mm	0.214
012110	S R 19 CF 1/2 45°	19	3/4"	1/2"		31.8mm	7.8mm	0.175
012113	S R 19 CF 3/4 45°	19	3/4"	3/4"		41.3mm	8.8mm	0.235
012107	S R 19 CF 1" 45°	19	3/4"	1"		47.6mm	9.5mm	0.289
012254	S R 25 CF 3/4 45°	25	1"	3/4"		41.3mm	8.8mm	0.34
012248	S R 25 CF 1" 45°	25	1"	1"		47.6mm	9.5mm	0.438
012251	S R 25 CF 1"1/4 45°	25	1"	1"1/4		54.0mm	10.3mm	0.525
012359	S R 32 CF 1" 45°	32	1"	1"		47.6mm	9.5mm	0.59
012362	S R 32 CF 1"1/4 45°	32	1"1/4	1"1/4		54.0mm	10.3mm	0.664
108610	S R 32 CF 1"1/2 45°	32	1"1/4	1"1/2		63.5mm	12.6mm	0.918
108617	S R 38 CF 1"1/4 45°	38	1"1/2	1"1/4		54mm	10.3mm	0
012449	S R 38 CF 1"1/2 45°	38	1"1/2	1"1/2		63.5mm	12.6mm	1.01
108614	S R 38 CF 2" 45°	38	1"1/2	2"		79.4mm	12.6mm	1.66
012511	S R 50 CF 2" 45°	50	2"	2"		79.4mm	12.6mm	1.984