


Embout à sertir 45° femelle MÉTRIQUE cone 60°

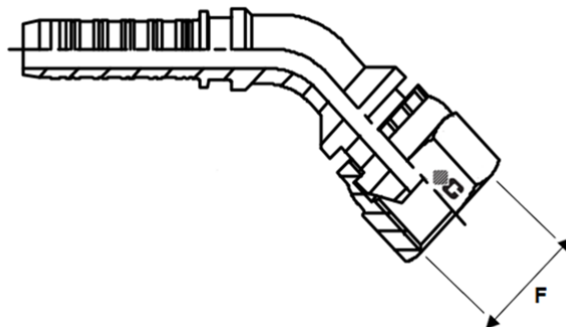

DKM - DIN CONE 60°

Matière: Acier

Montage: Avec ou sans dénudage

Norme: ISO 8434-6 - DIN 3863

Code	Référence	Diamètre tuyau (mm)	Diamètre tuyau (pouce)	F (Filetage)	H (mm)	S (mm)	E (mm)	Poids
038142	S R 5 DF 12 45°	5	3/16"	M12X150				0.033
038143	S R 6 DF 12 45°	6	1/4"	M12X150				0.037
038144	S R 6 DF 14 45°	6	1/4"	M14X150				0.04
038145	S R 6 DF 16 45°	6	1/4"	M16X150				0.056
038146	S R 6 DF 18 45°	6	1/4"	M18X150				0.052
038147	S R 8 DF 14 45°	8	5/16"	M14X150				0.055
038148	S R 8 DF 16 45°	8	5/16"	M16X150				0.066
038149	S R 8 DF 18 45°	8	5/16"	M18X150				0.062
038150	S R 10 DF 14 45°	10	3/8"	M14X150				0.072
038151	S R 10 DF 16 45°	10	3/8"	M16X150				0.072
038152	S R 10 DF 18 45°	10	3/8"	M18X150				0.067
038153	S R 10 DF 20 45°	10	3/8"	M20X150				0.098
038154	S R 10 DF 22 45°	10	3/8"	M22X150				0.093
038155	S R 13 DF 18 45°	13	1/2"	M18X150				0.12
038156	S R 13 DF 20 45°	13	1/2"	M20X150				0.119
038157	S R 13 DF 22 45°	13	1/2"	M22X150				0.113
038158	S R 13 DF 26 45°	13	1/2"	M26X150				0.167
038559	S R 16 DF 26 45°	16	5/8"	M26X150				0.195
012125	S R 19 DF 26 45°	19	3/4"	M26X150				0.216
012128	S R 19 DF 30 45°	19	3/4"	M30X200				0
012265	S R 25 DF 38 45°	25	1"	M38X150				0.58
012373	S R 32 DF 45 45°	32	1 1/4"	M45X150				0