


Embout à sertir 45° femelle DIN S

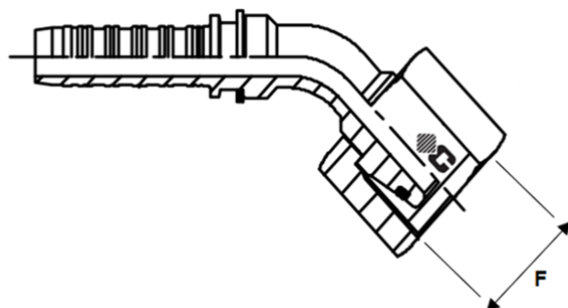

DKOS 45° - CONE 24° - SERIE LOURDE AVEC JOINT

Matière: Acier
Montage: Avec ou sans dénudage
Norme: ISO 8434-1 (DIN 2353).

Code	Référence	Diamètre tuyau (mm)	Diamètre tuyau (pouce)	F (Filetage)	H (mm)	S (mm)	E (mm)	Poids
035419	S R 2 EFR 6 S 45°	2	1/12"	6S - M14X150				0.026
035420	S R 2 EFR 8 S 45°	2	1/12"	8S - M16X150				0.034
035421	S R 2 EFR 10 S 45°	2	1/12"	10S - M18X150				0.045
035422	S R 3 EFR 6 S 45°	3	1/8"	6S - M14X150				0.028
035423	S R 3 EFR 8 S 45°	3	1/8"	8S - M16X150				0.039
035424	S R 3 EFR 10 S 45°	3	1/8"	10S - M18X150				0.04
035425	S R 4 EFR 6 S 45°	4	5/32"	6S - M14X150				0.02
035426	S R 4 EFR 8 S 45°	4	5/32"	8S - M16X150				0.035
035427	S R 4 EFR 10 S 45°	4	5/32"	10S - M18X150				0.034
035428	S R 4 EFR 12 S 45°	4	5/32"	12S - M20X150				0.045
026094	S R 5 EFR 6 S 45°	5	3/16"	6S - M14X150				0.039
032299	S R 5 EFR 8 S 45°	5	3/16"	8S - M16X150				0.041
011419	S R 6 EFR 6 S 45°	6	1/4"	6S - M14X150				0.044
011425	S R 6 EFR 8 S 45°	6	1/4"	8S - M16X150				0.044
011409	S R 6 EFR 10 S 45°	6	1/4"	10S - M18X150				0.055
011413	S R 6 EFR 12 S 45°	6	1/4"	12S - M20X150				0.062
108559	S R 8 EFR 8 S 45°	8	5/16"	8S - M16X150				0.046
011548	S R 8 EFR 10 S 45°	8	5/16"	10S - M18X150				0.062
011556	S R 8 EFR 12 S 45°	8	5/16"	12S - M20X150				0.069
011559	S R 8 EFR 14 S 45°	8	5/16"	14S - M22X150				0.09
043082	S R 10 EFR 10 S 45°	10	3/8"	10S - M18X150				0.061
011674	S R 10 EFR 12 S 45°	10	3/8"	12S - M20X150				0.076
011677	S R 10 EFR 14 S 45°	10	3/8"	14S - M22X150				0.103
011683	S R 10 EFR 16 S 45°	10	3/8"	16S - M24X150				0.11
038719	S R 13 EFR 12 S 45°	13	1/2"	12S - M20X150				0.09
011826	S R 13 EFR 14 S 45°	13	1/2"	14S - M22X150				0.13
011833	S R 13 EFR 16 S 45°	13	1/2"	16S - M24X150				0.141
011839	S R 13 EFR 20 S 45°	13	1/2"	20S - M30X200				0.19
012003	S R 16 EFR 16 S 45°	16	5/8"	16S - M24X150				0.15
012009	S R 16 EFR 20 S 45°	16	5/8"	20S - M30X200				0.223
012015	S R 16 EFR 25 S 45°	16	5/8"	25S - M36X200				0.36
012145	S R 19 EFR 20 S 45°	19	3/4"	20S - M30X200				0.23
060447	S R 19 EFR 25 S 45°	19	3/4"	25S - M36X200				0.389
012158	S R 19 EFR 30 S 45°	19	3/4"	30S - M42X200				0.47
012279	S R 25 EFR 25 S 45°	25	1"	25S - M36X200				0.38
012285	S R 25 EFR 30 S 45°	25	1"	30S - M42X200				0.579

Code	Référence	Diamètre tuyau (mm)	Diamètre tuyau (pouce)	F (Filetage)	H (mm)	S (mm)	E (mm)	Poids
012291	S R 25 EFR 38 S 45°	25	1"	38S - M52X200				0.7
012386	S R 32 EFR 30 S 45°	32	1"1/4	30S - M42X200				0.73
012392	S R 32 EFR 38 S 45°	32	11/4"	38S - M52X200				0.82
012471	S R 38 EFR 38 S 45°	38	1"1/2	38S - M52X200				0.94
038745	S R 38 EFR 50 S 45°	38	1"1/2	50S - M68X200				1.4