


Embout à sertir 45° femelle JIC - écrou à jonc

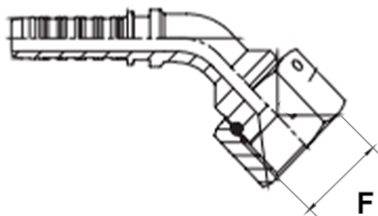

DKJ 45° - CONE 74° - AVEC ECROU A JONC

Matière: Acier

Montage: Avec ou sans dénudage

Norme: ISO 8434-2 (SAE J514).

Code	Référence	Diamètre tuyau (mm)	Diamètre tuyau (pouce)	F (Filetage)	H (mm)	S (mm)	E (mm)	Poids
038624	S R 5 JFJ 7/16 45°	5	3/16"	7/16 - 20				0.028
038623	S R 5 JFJ 1/2 45°	5	3/16"	1/2 - 20				0.037
038622	S R 6 JFJ 7/16 45°	6	1/4"	7/16 - 20				0.031
038621	S R 6 JFJ 1/2 45°	6	1/4"	1/2 - 20				0.04
038620	S R 6 JFJ 9/16 45°	6	1/4"	9/16 - 18				0.049
137295	S R 8 JFJ 1/2 45°	8	5/16"	1/2 - 20				0.04
137296	S R 8 JFJ 3/4 45°	8	5/16"	3/4 - 16				0.04
038619	S R 8 JFJ 9/16 45°	8	5/16"	9/16 - 18				0.058
038618	S R 10 JFJ 9/16 45°	10	3/8"	9/16 - 18				0.065
038617	S R 10 JFJ 3/4 45°	10	3/8"	3/4 - 16				0.08
038616	S R 10 JFJ 7/8 45°	10	3/8"	7/8 - 14				0.115
038615	S R 13 JFJ 3/4 45°	13	1/2"	3/4 - 16				0.096
038614	S R 13 JFJ 7/8 45°	13	1/2"	7/8 - 14				0.135
038613	S R 13 JFJ 1"1/16 45°	13	1/2"	1"1/16 - 12				0.165
038612	S R 16 JFJ 7/8 45°	16	5/8"	7/8 - 14				0.166
038611	S R 16 JFJ 1"1/16 45°	16	5/8"	1"1/16 - 12				0.2
137297	S R 19 JFJ 7/8 45°	19	3/4"	7/8 - 14				0.04
031420	S R 19 JFJ 1"1/16 45°	19	3/4"	1"1/16 - 12				0.225
038575	S R 19 JFJ 1"3/16 45°	19	3/4"	1"3/16 - 12				0.278
038574	S R 19 JFJ 1"5/16 45°	19	3/4"	1"5/16 - 12				0.326
137298	S R 25 JFJ 1"1/16 45°	25	1"	1"1/16 - 12				0.04
031423	S R 25 JFJ 1"5/16 45°	25	1"	1"5/16 - 12				0.471
012325	S R 25 JFJ 1"5/8 45°	25	1"	1"5/8 - 12				0.586
012420	S R 32 JFJ 1"5/8 45°	32	1"1/4"	1"5/8 - 12				0.739
012423	S R 32 JFJ 1"7/8 45°	32	1"1/4"	1"7/8 - 12				1.003
137300	S R 38 JFJ 2"1/2 45°	38	1"1/2"	2"1/2 - 12				1.64
012489	S R 38 JFJ 1"7/8 45°	38	1"1/2"	1"7/8 - 12				1.167
012532	S R 50 JFJ 2"1/2 45°	50	2"	2"1/2 - 12				2.172