


Embout à sertir 45° femelle ORFS

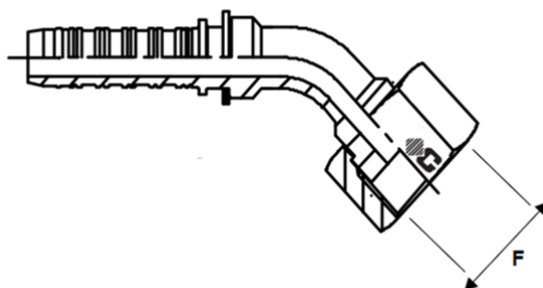

ORFS 45° - FOND PLAT

Matière: Acier
Montage: Avec ou sans dénudage
Norme: ISO 8434-3 (SAE J1453).

Code	Référence	Diamètre tuyau (mm)	Diamètre tuyau (pouce)	F (Filetage)	H (mm)	S (mm)	E (mm)	Poids
035517	S R 2 JFP 9/16 45°	2	1/12"	9/16 - 18				0
035518	S R 3 JFP 9/16 45°	3	1/8"	9/16 - 18				0
035519	S R 4 JFP 9/16 45°	4	5/32"	9/16 - 18				0
011471	S R 6 JFP 9/16 45°	6	1/4"	9/16 - 18				0.035
011468	S R 6 JFP 11/16 45°	6	1/4"	11/16 - 16				0.054
011604	S R 8 JFP 11/16 45°	8	5/16"	11/16 - 16				0.062
137118	S R 10 JFP 9/16 45°	10	3/8"	9/16 - 18				0
011740	S R 10 JFP 11/16 45°	10	3/8"	11/16 - 16				0.069
011743	S R 10 JFP 13/16 45°	10	3/8"	13/16 - 16				0.077
011912	S R 13 JFP 13/16 45°	13	1/2"	13/16 - 16				0.095
011906	S R 13 JFP 1" 45°	13	1/2"	1" - 14				0.14
041390	S R 13 JFP 1"3/16 45°	13	1/2"	13/16 - 16				0.2
012062	S R 16 JFP 1" 45°	16	5/8"	1" - 25				0.177
012065	S R 16 JFP 1"3/16 45°	16	5/8"	1"3/16 - 12				0.228
035277	S R 19 JFP 1" 45°	19	3/4"	1" - 14				0.21
012207	S R 19 JFP 1"3/16 45°	19	3/4"	1"3/16 - 12				0.264
012210	S R 19 JFP 1"7/16 45°	19	3/4"	1"7/16 - 12				0.289
012331	S R 25 JFP 1"7/16 45°	25	1"	1"7/16 - 12				0.484
035276	S R 25 JFP 1"11/16 45°	25	1"	1"11/16 - 12				0.53
012426	S R 32 JFP 1"11/16 45°	32	1"1/4	1"11/16 - 12				0.616
012492	S R 38 JFP 2" 45°	38	1"1/2	2" - 12				0.985