


Embout à sertir 45° femelle BSP - écrou serti

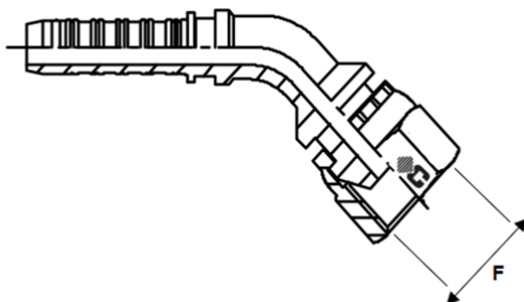

DKR 45° - CONE 60° - AVEC ECROU SERTI

Matière: Acier

Montage: Avec ou sans dénudage

Norme: ISO 8434-6 (BS 5200).

Code	Référence	Diamètre tuyau (mm)	Diamètre tuyau (pouce)	F (Filetage)	H (mm)	S (mm)	E (mm)	Poids
035442	S R 2 WF 1/8 45°	2	1/12"	1/8"				0.02
035443	S R 2 WF 1/4 45°	2	1/12"	1/4"				0.03
035444	S R 3 WF 1/8 45°	3	1/8"	1/8"				0.022
035445	S R 3 WF 1/4 45°	3	1/8"	1/4"				0.031
035446	S R 4 WF 1/8 45°	4	5/32"	1/8"				0.02
035447	S R 4 WF 1/4 45°	4	5/32"	1/4"				0.035
032298	S R 5 WF 1/8 45°	5	3/16"	1/8"				0.028
011385	S R 5 WF 1/4 45°	5	3/16"	1/4"				0.037
011508	S R 6 WF 1/8 45°	6	1/4"	1/8"				0.031
011503	S R 6 WF 1/4 45°	6	1/4"	1/4"				0.041
011511	S R 6 WF 3/8 45°	6	1/4"	3/8"				0.055
062763	S R 6 WF 1/2 45°	6	1/4"	1/2"				0
011634	S R 8 WF 1/4 45°	8	5/16"	1/4"				0.056
011637	S R 8 WF 3/8 45°	8	5/16"	3/8"				0.065
062764	S R 8 WF 1/2 45°	8	5/16"	1/2"				0
011774	S R 10 WF 1/4 45°	10	3/8"	1/4"				0.073
011777	S R 10 WF 3/8 45°	10	3/8"	3/8"				0.07
011770	S R 10 WF 1/2 45°	10	3/8"	1/2"				0.097
011941	S R 13 WF 3/8 45°	13	1/2"	3/8"				0.123
011934	S R 13 WF 1/2 45°	13	1/2"	1/2"				0.117
011944	S R 13 WF 5/8 45°	13	1/2"	5/8"				0.142
011938	S R 13 WF 3/4 45°	13	1/2"	3/4"				0.164
012085	S R 16 WF 1/2 45°	16	5/8"	1/2"				0.163
012091	S R 16 WF 5/8 45°	16	5/8"	5/8"				0.172
012088	S R 16 WF 3/4 45°	16	5/8"	3/4"				0.192
137049	S R 19 WF 1/2 45°	19	3/4"	1/2"				0.16
012226	S R 19 WF 3/4 45°	19	3/4"	3/4"				0.213
137050	S R 19 WF 5/8 45°	19	5/8"	5/8"				0.18
012223	S R 19 WF 1" 45°	19	3/4"	1"				0.296
034303	S R 25 WF 3/4 45°	25	1"	3/4"				0.33
012345	S R 25 WF 1" 45°	25	1"	1"				0.441
062765	S R 25 WF 1"1/4 45°.	VOIR SERIE	WFRJ ou WFRV					0
129781	S R 32 WFR 1"1/4 45°	32	1"1/4"	1"1/4"				0.38
062767	S R 32 WF 1"1/2 45°.	VOIR SERIE	WFRJ ou WFRV					0
129783	S R 38 WFR 1"1/2 45°	38	1"1/2"	1"1/2"				0.38
062770	S R 38 WF 2" 45°.	VOIR SERIE	WFRJ ou WFRV					0

Code	Référence	Diamètre tuyau (mm)	Diamètre tuyau (pouce)	F (Filetage)	H (mm)	S (mm)	E (mm)	Poids
129788	S R 50 WFR 2" 45°	50	2"	2"				0.38
107882	S R 76 WF 3" 45°	76		3"				2.835