


Embout à sertir 45° femelle BSP - écrou à voile

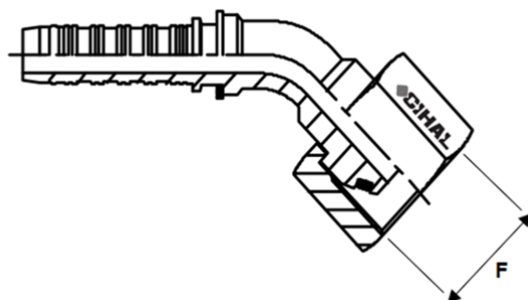

DKOR 45° - CONE 60° - AVEC ECRU A VOILE ET JOINT

Matière: Acier

Montage: Avec ou sans dénudage

Norme: ISO 8434-6 (BS 5200).

Code	Référence	Diamètre tuyau (mm)	Diamètre tuyau (pouce)	F (Filetage)	H (mm)	S (mm)	E (mm)	Poids
061755	S R 5 WFRV 1/4 45°	5	3/16"	1/4"				0.04
029573	S R 6 WFRV 1/4 45°	6	1/4"	1/4"				0.046
029576	S R 6 WFRV 3/8 45°	6	1/4"	3/8"				0.059
061758	S R 6 WFRV 1/2 45°	6	1/4"	1/2"				0.07
029580	S R 8 WFRV 3/8 45°	8	5/16"	3/8"				0.07
061760	S R 8 WFRV 1/2 45°	8	5/16"	1/2"				0.079
029584	S R 10 WFRV 3/8 45°	10	3/8"	3/8"				0.074
061762	S R 10 WFRV 1/2 45°	10	3/8"	1/2"				0.095
061763	S R 13 WFRV 1/2 45°	13	1/2"	1/2"				0.128
061764	S R 13 WFRV 5/8 45°	13	1/2"	5/8"				0.13
061765	S R 13 WFRV 3/4 45°	13	1/2"	3/4"				0.1
061766	S R 16 WFRV 3/4 45°	16	5/8"	3/4"				0.2
029608	S R 19 WFRV 1" 45°	19	3/4"	1"				0.308
061768	S R 25 WFRV 1"1/4 45°	25	1"	1"1/4				0.582
061770	S R 32 WFRV 1"1/4 45°	32	1"1/4	1"1/4				0.715
061769	S R 32 WFRV 1"1/2 45°	32	1"1/4	1"1/2				0.845
061771	S R 38 WFRV 1"1/2 45°	38	1"1/2	1"1/2				1.017
061772	S R 38 WFRV 2" 45°	38	1"1/2	2"				1.38