


Embout à sertir femelle JIC - écrou à voile

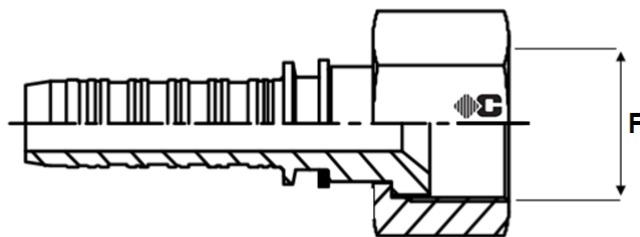

DKJ - CONE 74° - AVEC ECROU A VOILE

Matière: Acier

Montage: Avec ou sans dénudage

Norme: ISO 8434-2 (SAE J514).

Code	Référence	Diamètre tuyau (mm)	Diamètre tuyau (pouce)	F (Filetage)	H (mm)	S (mm)	E (mm)	Poids
062861	S R 5 JFV 7/16	5	3/16"	7/16 - 20				0.018
062863	S R 5 JFV 1/2	5	3/16"	1/2 - 20				0.025
062864	S R 6 JFV 9/16	6	1/4"	9/16 - 18				0.034
062865	S R 8 JFV 9/16	8	5/16"	9/16 - 18				0
062866	S R 10 JFV 3/4	10	3/8"	3/4 - 16				0.059
062867	S R 10 JFV 7/8	10	3/8"	7/8 - 14				0.076
062868	S R 13 JFV 7/8	13	1/2"	7/8 - 14				0.089
062869	S R 13 JFV 1"1/16	13	1/2"	1"1/16 - 12				0.118
062870	S R 16 JFV 1"1/16	16	5/8"	1"1/16 - 12				0.128
062871	S R 19 JFV 1"3/16	19	3/4"	1"3/16 - 12				0.164
062872	S R 19 JFV 1"5/16	19	3/4"	1"5/16 - 12				0.208
062873	S R 25 JFV 1"5/8	25	1"	1"5/8 - 12				0.32
062874	S R 32 JFV 1"7/8	32	1"1/4	1"7/8 - 12				0.414