


Embout à sertir femelle KOMATSU

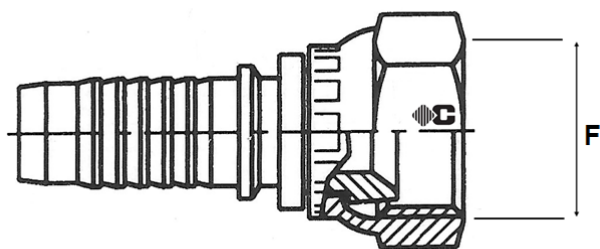

METRIQUE CONE INVERSE (60°)

Matière: Acier

Montage: Avec ou sans dénudage

Norme: Type Komatsu

Code	Référence	Diamètre tuyau (mm)	Diamètre tuyau (pouce)	F (Filetage)	H (mm)	S (mm)	E (mm)	Poids
011487	S R 6 KMF 14	6	1/4"	M14X150				0.043
011488	S R 6 KMF 16	6	1/4"	M16X150				0
026112	S R 8 KMF 14	8	5/16"	M14X150				0.03
011620	S R 8 KMF 16	8	5/16"	M16X150				0.057
044480	S R 10 KMF 14	10	3/8"	M14X150				0.04
011754	S R 10 KMF 16	10	3/8"	M16X150				0.06
011755	S R 10 KMF 18	10	3/8"	M18X150				0.074
011921	S R 13 KMF 22	13	1/2"	M22X150				0.021
026111	S R 13 KMF 24	13	1/2"	M24X150				0.042
012073	S R 16 KMF 24	16	5/8"	M24X150				0.166
012220	S R 19 KMF 30	19	3/4"	M30X150				0.235
012339	S R 25 KMF 33	25	1"	M33X150				0.27
012432	S R 32 KMF 36	32	1 1/4"	M36X150				0.47