


Embout à sertir femelle BSP - écrou à voile

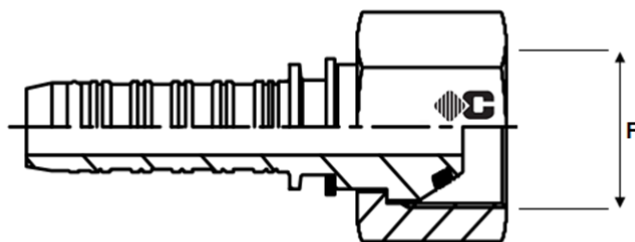

DKOR - CONE 60° - AVEC ECROU A VOILE ET JOINT

Matière: Acier

Montage: Avec ou sans dénudage

Norme: ISO 8434-6 (BS 5200).

Code	Référence	Diamètre tuyau (mm)	Diamètre tuyau (pouce)	F (Filetage)	H (mm)	S (mm)	E (mm)	Poids
061664	S R 5 WFRV 1/4	5	3/16"	1/4"				0.03
029572	S R 6 WFRV 1/4	6	1/4"	1/4"				0.036
061667	S R 6 WFRV 3/8	6	1/4"	3/8"				0.049
026097	S R 6 WFRV 1/2	6	1/4"	1/2"				0.084
029579	S R 8 WFRV 3/8	8	5/16"	3/8"				0.05
011631	S R 8 WFRV 1/2	8	5/16"	1/2"				0.086
029583	S R 10 WFRV 3/8	10	3/8"	3/8"				0.053
061671	S R 10 WFRV 1/2	10	3/8"	1/2"				0.09
061672	S R 13 WFRV 1/2	13	1/2"	1/2"				0.095
061673	S R 13 WFRV 5/8	13	1/2"	5/8"				0.1
061674	S R 13 WFRV 3/4	13	1/2"	3/4"				0.11
029613	S R 16 WFRV 3/4	16	5/8"	3/4"				0.12
029607	S R 19 WFRV 1"	19	3/4"	1"				0.253
061679	S R 25 WFRV 1"1/4	25	1"	1"1/4				0.41
061680	S R 32 WFRV 1"1/4	32	1"1/4	1"1/4				0.451
061681	S R 32 WFRV 1"1/2	32	1"1/4	1"1/2				0.683
061682	S R 38 WFRV 1"1/2	38	1"1/2	1"1/2				0.618
061683	S R 38 WFRV 2"	38	1"1/2	2"				0.91