


Union femelle MÉTRIQUE série L et S

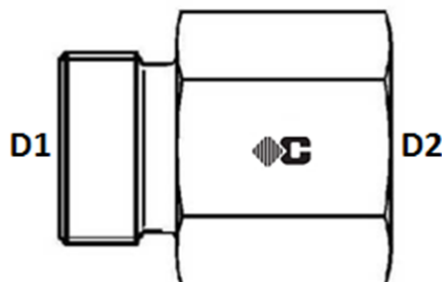

RACCORD DIN CONE 24°

Matière: acier

Norme: ISO 8434-1 (DIN 2353)

Type: 1008

Raccord livré nu, sans bague et sans ecrou

Code	Référence	D1	D2	D3	Pression (Bar)	Poids
SÉRIE L						
003755	6DL 6/10X100 NU	6L - M12X150	M10X100		315	0
003759	6DL 8/12X150 NU	8L - M14X150	M12X150		315	0
003766	6DL10/14X150 NU	10L - M16X150	M14X150		315	0
003771	6DL12/16X150 NU	12L - M18X150	M16X150		315	0
003774	6DL15/18X150 NU	15L - M22X150	M18X150		315	0
003776	6DL18/22X150 NU	18L - M26X150	M22X150		315	0
003777	6DL22/26X150 NU	22L - M30X200	M26X150		160	0
SÉRIE S						
003784	6DS 6/12X150 NU	6S - M14X150	M12X150		400	0
003787	6DS 8/14X150 NU	8S - M16X150	M14X150		400	0
003790	6DS10/16X150 NU	10S - M18X150	M16X150		400	0
003794	6DS12/18X150 NU	12S - M20X150	M18X150		400	0
003797	6DS14/20X150 NU	14S - M22X150	M20X150		400	0
003799	6DS16/22X150 NU	16S - M24X150	M22X150		400	0
003800	6DS20/27X200 NU	20S - M30X200	M27X200		315	0
023405	6DS25/33X200 NU	25S - M36X200	M33X200		315	0