


## Union femelle x femelle - joint conique

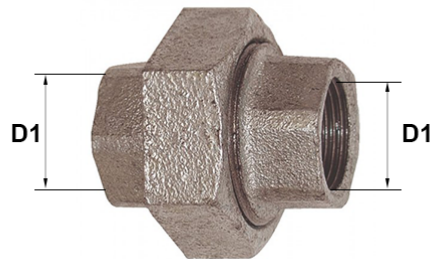

Union femelle x femelle - joint conique

**Utilisations :** Fluides courants compatibles.

**Matière :** Fonte galvanisée

**Limites de températures et PMS :**

De -20°C à +120°C : PMS = 25 Bars

De +120°C à +300°C : PMS = 20 Bars

Code	Référence	D1	D2	Poids
		FEMXFEM		
018121	340G 1/4	FEM 1/4		0.166
001817	340G 3/8	FEM 3/8		0.205
001812	340G 1/2	FEM 1/2		0.24
001816	340G 3/4	FEM 3/4		0.316
001809	340G 1"	FEM 1"		0.556
001811	340G 1"1/4	FEM 1"1/4		0.543
001810	340G 1"1/2	FEM 1"1/2		0.88
001813	340G 2"	FEM 2"		1.24
001814	340G 2"1/2	FEM 2"1/2		2.01
001815	340G 3"	FEM 3"		2.765
018122	340G 4"	FEM 4"		4.5