


Embout interlock à bride 6000 PSI

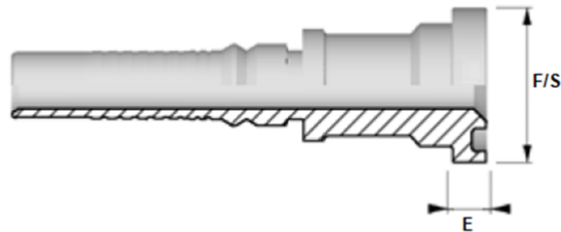

SFS - COLLET 6000 PSI

Matière: acier

Montage: avec dénudage intérieur et extérieur

Norme: SAE J518 - serie 6000 psi

Type: 8081

Code	Référence	Diamètre tuyau (mm)	Diamètre tuyau (pouce)	F (mm)	H (mm)	S (mm)	E (mm)	Poids
102648	H A 25 CF 1"1/2	25	1"	1"1/2		63.5mm	12.6mm	0.457
008088	H A 16 CF 3/4	16	5/8	3/4"		41.3mm	8.8mm	0
008110	H A 19 CF 3/4	19	3/4	3/4"		41.3mm	8.8mm	0.282
008107	H A 19 CF 1"	19	3/4	1"		47.6mm	9.5mm	0.368
016916	H A 25 CF 3/4	25	1"	3/4"		41.3mm	8.8mm	0.352
008159	H A 25 CF 1"	25	1"	1"		47.6mm	9.5mm	0.457
008164	H A 25 CF 1"1/4	25	1"	1"1/4		54mm	10.3mm	0.596
035146	H A 32 CF 1"	32	1"1/4	1"		47.6mm	9.5mm	0.648
008209	H A 32 CF 1"1/4	32	1"1/4	1"1/4		54mm	10.3mm	0.745
008206	H A 32 CF 1"1/2	32	1"1/4	1"1/2		63.5mm	12.6mm	0.936
055459	H A 38 CF 1"1/4	38	1"1/2	1"1/4		54mm	10.3mm	0.785
008237	H A 38 CF 1"1/2	38	1"1/2	1"1/2		63mm	12.6mm	1.036
008240	H A 38 CF 2"	38	1"1/2	2"		79.4mm	12.6mm	1.582
008261	H A 50 CF 2"	50	2"	2"		79.4mm	12.6mm	1.897