


Embout interlock 22,5° à bride 6000 PSI

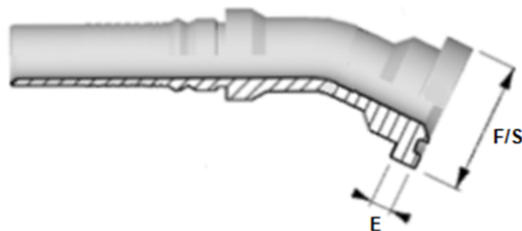

SFS22,5 - COLLET 6000 PSI

Matière: acier

Montage: avec dénudage intérieur et extérieur

Norme: SAE J518 - serie 6000 psi

Code	Référence	Diamètre tuyau (mm)	Diamètre tuyau (pouce)	F (mm)	H (mm)	S (mm)	E (mm)	Poids
024302	H A 19 CF 3/4 22,5°	19	3/4"	3/4"		41.3mm	8.8mm	0
024263	H A 19 CF 1" 22,5°	19	3/4"	1"		47.6mm	9.5mm	0
024283	H A 25 CF 1" 22,5°	25	1"	1"		47.6mm	9.5mm	0
024284	H A 25 CF 1"1/4 22,5°	25	1"	1"1/4		54mm	10.3mm	0
024297	H A 32 CF 1"1/4 22,5	32	1"1/4	1"1/4		54mm	10.3mm	0
024298	H A 32 CF 1"1/2 22,5°	32	1"1/4	1"1/2	SUR DEMANDE	63.5mm	12.6mm	0