


Embout interlock 45° à bride 6000 PSI

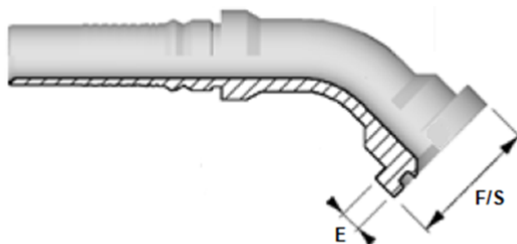

SFS45 - COLLET 6000 PSI

Matière: acier

Montage: avec dénudage intérieur et extérieur

Norme: SAE J518 - serie 6000 psi

Type: 8083

Code	Référence	Diamètre tuyau (mm)	Diamètre tuyau (pouce)	F (mm)	H (mm)	S (mm)	E (mm)	Poids
018820	H A 16 CF 3/4 45°	16	5/8"	3/4"		41.3mm	8.8mm	0.272
008111	H A 19 CF 3/4 45°	19	3/4	3/4"		41.3mm	8.8mm	0.321
008108	H A 19 CF 1" 45°	19	3/4	1"		47.6mm	9.5mm	0.408
024104	H A 25 CF 3/4 45°	25	1"	3/4"		41.3mm	8.8mm	0.545
008160	H A 25 CF 1" 45°	25	1"	1"		47.6mm	9.5mm	0.569
008165	H A 25 CF 1"1/4 45°	25	1"	1"1/4		54mm	10.3mm	0.704
028350	H A 32 CF 1" 45°	32	1"1/4	1"		47.6mm	9.5mm	0.735
008210	H A 32 CF 1"1/4 45°	32	1"1/4	1"1/4		54mm	10.3mm	0.918
008207	H A 32 CF 1"1/2 45°	32	1"1/4	1"1/2		63.5mm	12.6mm	1.138
008238	H A 38 CF 1"1/2 45°	38	1"1/2	1"1/2		63.5mm	12.6mm	1.383
008241	H A 38 CF 2" 45°	38	1"1/2	2"		79.4mm	12.6mm	1.817
008262	H A 50 CF 2" 45°	50	2"	2"		79.4mm	12.6mm	2.844