


## Embout interlock male série S

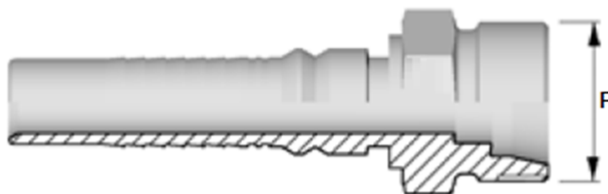

CES - CONE 24° - SERIE LOURDE

**Matière:** acier

**Montage:** avec dénudage intérieur et extérieur

**Norme:** ISO 8434-1 (DIN 2353)

**Type:** 8060

| Code   | Référence      | Diamètre tuyau (mm) | Diamètre tuyau (pouce) | F (mm)        | H (mm) | S (mm) | E (mm) | Poids |
|--------|----------------|---------------------|------------------------|---------------|--------|--------|--------|-------|
| 008094 | H A 16 EM 20 S | 16                  | 5/8"                   | 20S - M30X200 |        |        |        | 0.162 |
| 008128 | H A 19 EM 20 S | 19                  | 3/4"                   | 20S - M30X200 |        |        |        | 0.187 |
| 008129 | H A 19 EM 25 S | 19                  | 3/4"                   | 25S - M36X200 |        |        |        | 0.271 |
| 035173 | H A 25 EM 25 S | 25                  | 1"                     | 25S - M36X200 |        |        |        | 0.336 |
| 008179 | H A 25 EM 30 S | 25                  | 1"                     | 30S - M42X200 |        |        |        | 0.398 |
| 008222 | H A 32 EM 38 S | 32                  | 1"1/4                  | 38S - M52X200 |        |        |        | 0.683 |
| 058666 | H A 38 EM 38 S | 38                  | 1"1/2                  | 38S - M52X200 |        |        |        | 0.681 |