


Embout à sertir femelle ORFS double hexagone

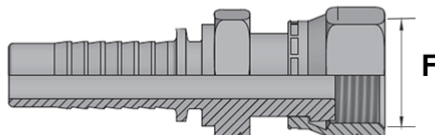

Embout à sertir femelle ORFS double hexagone

Matière: acier
Montage: Avec ou sans dénudage
Norme: Type Fond Plat

Code	Référence	Diamètre tuyau (mm)	Diamètre tuyau (pouce)	F (Filetage)	H (mm)	S (mm)	E (mm)	Poids
137648	S R 6 JFPH 9/16	6	1/4"	9/16"				0.026
137649	S R 6 JFPH 11/16	6	1/4"	11/16"				0.038
137650	S R 8 JFPH 11/16	8	5/16"	11/16"				0.05
112639	S R 10 JFPH 9/16	10	9/16"	9/16"				0.062
137651	S R 10 JFPH 11/16	10	3/8"	11/16"				0.067
137653	S R 10 JFPH 13/16	10	3/8"	13/16"				0.068
137654	S R 13 JFPH 11/16	13	1/2"	11/16"				0.051
137655	S R 13 JFPH 13/16	13	1/2"	13/16"				0
137656	S R 13 JFPH 1"	13	1/2"	1"				0.125
112644	S R 13 JFPH 1"3/16	13	1"3/16	1"3/16				0.186
137659	S R 16 JFPH 1"	16	5/8"	1"				0.134
137662	S R 16 JFPH 1"3/16	16	5/8"	1"3/16				0.192
137663	S R 19 JFPH 1"	19	3/4"	1"				0.073
137664	S R 19 JFPH 1"3/16	19	3/4"	1"3/16				0.203
137665	S R 19 JFPH 1"7/16	19	3/4"	1"7/16				0.263
137666	S R 25 JFPH 1"3/16	25	1"	1"3/16				0.293
137668	S R 25 JFPH 1"7/16	25	1"	1"7/16				0.293
137670	S R 25 JFPH 1"11/16	25	1"	1"11/16				0.432
137672	S R 32 JFPH 1"11/16	32	1"1/4	1"11/16				0.48
137674	S R 38 JFPH 2"	38	1"1/2	2"				0.688