


Embout sans dénudage à bride 6000 PSI

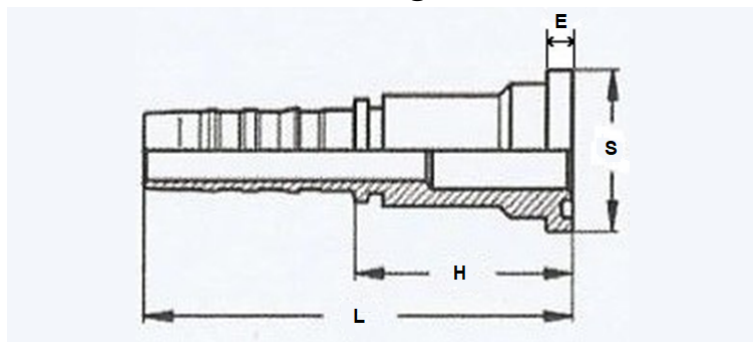

SFS - COLLET 6000 PSI POUR TUYAU 4SP-4SH-R13-R15

Matière : Acier
Montage: Sans dénudage
Norme: SAE J518 - Série 6000 psi

Code	Référence	Diamètre tuyau (mm)	Diamètre tuyau (pouce)	F	H (mm)	K (mm)	S / E (mm)	L	Poids
078898	S N 19 CF 3/4	19	3/4"	3/4"	59.0mm		41.3 / 8.8	110.0mm	0.284
078899	S N 19 CF 1"	19	3/4"	1"	61.0mm		47.6 / 9.5	112.0mm	0.35
078900	S N 25 CF 3/4	25	1"	3/4"	65.0mm		41.3 / 8.8	121.5mm	0.351
078901	S N 25 CF 1"	25	1"	1"	65.0mm		47.6 / 9.5	121.5mm	0.429
078902	S N 25 CF 1 1/4	25	1"	1 1/4	69.0mm		54.0 / 10.3	125.5mm	0.53
079437	S N 32 CF 1"	32	1 1/4	1"	70.0mm		47.6 / 9.5	136.5mm	0.543
078903	S N 32 CF 1 1/4	32	1 1/4	1 1/4	70.0mm		54.0 / 10.3	136.5mm	0.685
078904	S N 32 CF 1 1/2	32	1 1/4	1 1/2	80.0mm		63.5 / 12.6	146.5mm	0.896
090841	S N 38 CF 1 1/4	38	1 1/2	1 1/4	FABRICATION	SUR DEMANDE			0
078905	S N 38 CF 1 1/2	38	1 1/2	1 1/2	84.0mm		63.5 / 12.6	156.5mm	1.012
078906	S N 38 CF 2"	38	1 1/2	2"	99.0mm		79.4 / 12.6	181.5mm	1.563
090842	S N 50 CF 1 1/2	50	2"	1 1/2	FABRICATION	SUR DEMANDE			1.475
078907	S N 50 CF 2"	50	2"	2"	100.0mm		79.4 / 12.6	196.5mm	1.979