


Embout sans dénudage 45° à bride 6000 PSI

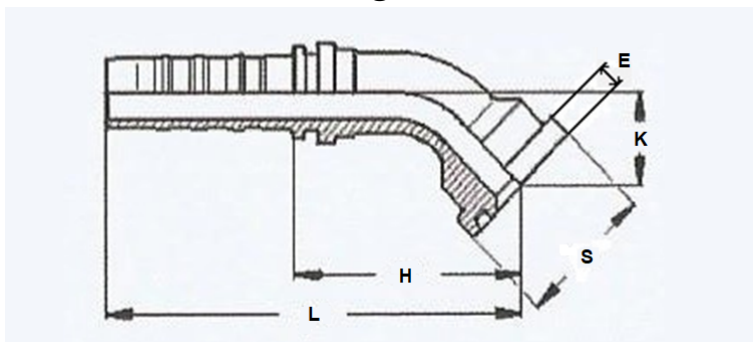

SFS 45° - COLLET 6000 PSI POUR TUYAU 4SP-4SH-R13-R15

Matière : Acier
Montage: Sans dénudage
Norme: SAE J518 - Série 6000 psi

Code	Référence	Diamètre tuyau (mm)	Diamètre tuyau (pouce)	F	H (mm)	K (mm)	S / E (mm)	L	Poids
078918	S N 19 CF 3/4 45°	19	3/4"	3/4"	66.0mm	28.0mm	41.3 / 8.8	117.0mm	0.347
078919	S N 19 CF 1" 45°	19	3/4"	1"	68.0mm	29.0mm	47.6 / 9.5	118.0mm	0.427
078920	S N 25 CF 3/4 45°	25	1"	3/4"	81.0mm	31.0mm	41.3 / 8.8	137.0mm	0.415
078921	S N 25 CF 1" 45°	25	1"	1"	80.0mm	30.0mm	47.6 / 9.5	136.0mm	0.538
078922	S N 25 CF 1"1/4 45°	25	1"	1"1/4	80.0mm	30.0mm	54.0 / 10.3	136.0mm	0.684
079438	S N 32 CF 1" 45°	32	1"1/4	1"	96.0mm	37.0mm	47.6 / 9.5	163.0mm	0
078923	S N 32 CF 1"1/4 45°	32	1"1/4	1"1/4	93.0mm	34.0mm	54.0 / 10.3	160.0mm	0.859
078924	S N 32 CF 1"1/2 45°	32	1"1/4	1"1/2	94.0mm	35.0mm	63.5 / 12.6	161.0mm	1.198
078925	S N 38 CF 1"1/2 45°	38	1"1/2	1"1/2	112.0mm	40.0mm	63.5 / 12.6	195.0mm	1.438
078926	S N 38 CF 2" 45°	38	1"1/2	2"	115.0mm	43.0mm	79.4 / 12.6	198.0mm	0
078927	S N 50 CF 2" 45°	50	2"	2"	150.0mm	61.0mm	79.4 / 12.6	247.0mm	2.673