


Embout sans dénudage 90° à bride 6000 PSI

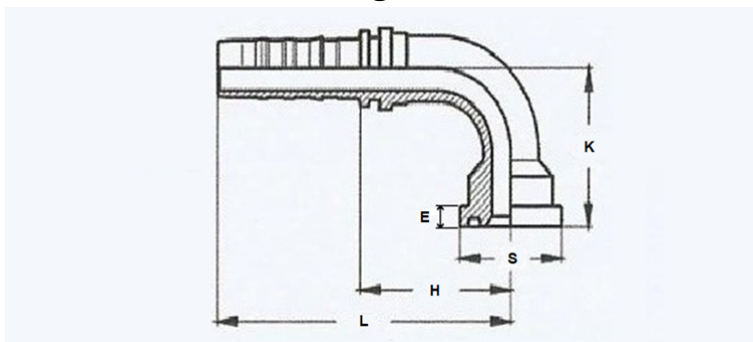

SFS 90° - COLLET 6000 PSI POUR TUYAU 4SP-4SH-R13-R15

Matière : Acier
Montage: Sans dénudage
Norme: SAE J518 - Série 6000 psi

Code	Référence	Diamètre tuyau (mm)	Diamètre tuyau (pouce)	F	H (mm)	K (mm)	S / E (mm)	L	Poids
078908	S N 19 CF 3/4 90°	19	3/4"	3/4"	55.0mm	56.0mm	41.3 / 8.8	106.0mm	0.407
078909	S N 19 CF 1" 90°	19	3/4"	1"	55.0mm	58.0mm	47.6 / 9.5	106.0mm	0.479
078910	S N 25 CF 3/4 90°	25	1"	3/4"	71.0mm	65.0mm	41.3 / 8.8	128.0mm	0.552
078911	S N 25 CF 1" 90°	25	1"	1"	71.0mm	64.0mm	47.6 / 9.5	128.0mm	0.597
078912	S N 25 CF 1"1/4 90°	25	1"	1"1/4	71.0mm	64.0mm	54.0 / 10.3	128.0mm	0.793
079439	S N 32 CF 1" 90°	32	1"1/4	1"	87.0mm	79.0mm	47.6 / 9.5	154.0mm	0.831
078913	S N 32 CF 1"1/4 90°	32	1"1/4	1"1/4	87.0mm	74.0mm	54.0 / 10.3	154.0mm	0.996
078914	S N 32 CF 1"1/2 90°	32	1"1/4	1"1/2	87.0mm	76.0mm	63.5 / 12.6	154.0mm	1.404
078915	S N 38 CF 1"1/2 90°	38	1"1/2	1"1/2	105.0mm	88.0mm	63.5 / 12.6	188.0mm	1.609
078916	S N 38 CF 2" 90°	38	1"1/2	2"	105.0mm	93.0mm	79.4 / 12.6	188.0mm	0
078917	S N 50 CF 2" 90°	50	2"	2"	140.0mm	123.0mm	79.4 / 12.6	237.0mm	3.301