


Embout sans dénudage 45° à bride 3000 PSI

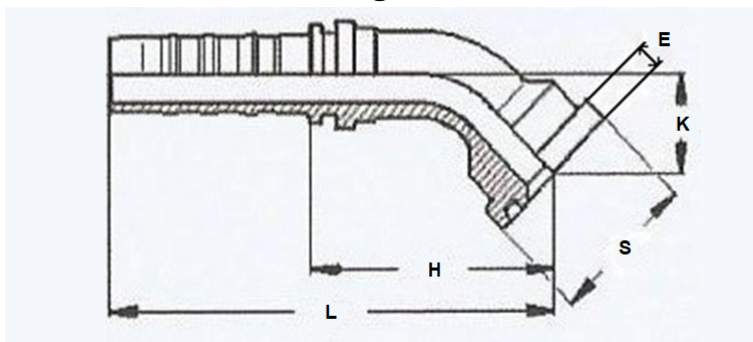

SFL 45° - COLLET 3000 PSI POUR TUYAU 4SP-4SH-R13-R15

Matière : Acier
Montage: Sans dénudage
Norme: SAE J518 - Série 3000 psi

Code	Référence	Diamètre tuyau (mm)	Diamètre tuyau (pouce)	F	H (mm)	K (mm)	S / E (mm)	L	Poids
078888	S N 19 CN 3/4 45°	19	3/4"	3/4"	63.0mm	25.0mm	38.1 / 6.7	114.0mm	0.306
078889	S N 19 CN 1" 45°	19	3/4"	1"	65.0mm	27.0mm	44.5 / 8.0	116.0mm	0.402
078890	S N 25 CN 3/4 45°	25	1"	3/4"	81.0mm	31.0mm	38.1 / 6.7	137.0mm	0
078891	S N 25 CN 1" 45°	25	1"	1"	78.0mm	28.0mm	44.4 / 8.0	134.0mm	0.456
078892	S N 25 CN 1"1/4 45°	25	1"	1"1/4	78.0mm	28.0mm	50.8 / 8.0	134.0mm	0.574
079431	S N 32 CN 1" 45°	32	1"1/4	1"	FABRICATION	SUR DEMANDE			0
078893	S N 32 CN 1"1/4 45°	32	1"1/4	1"1/4	91.0mm	32.0mm	50.8 / 8.0	157.0mm	0.771
078894	S N 32 CN 1"1/2 45°	32	1"1/4	1"1/2	91.0mm	32.0mm	60.3 / 8.0	157.0mm	0
078895	S N 38 CN 1"1/2 45°	38	1"1/2	1"1/2	108.0mm	36.0mm	60.3 / 8.0	191.0mm	1.049
078896	S N 38 CN 2" 45°	38	1"1/2	2"	107.0mm	35.0mm	71.4 / 9.5	189.0mm	0
078897	S N 50 CN 2" 45°	50	2"	2"	151.0mm	57.0mm	71.4 / 9.5	245.0mm	2.132