


Embout sans dénudage femelle série S

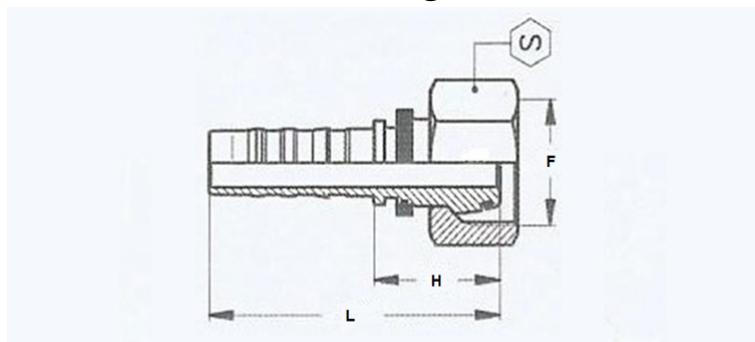

DKOS - CONE 24° - SERIE LOURDE AVEC JOINT POUR TUYAU 4SP-4SH-R13-R15

Matière : Acier
Montage: Sans dénudage
Norme: ISO 8434-1 (DIN 2353)

Code	Référence	Diamètre tuyau (mm)	Diamètre tuyau (pouce)	F	H (mm)	K (mm)	S / E (mm)	L	Poids
078780	S N 19 EFR 20 S	19	3/4"	20S - M30X200	37.0mm		36	88.0mm	0.28
078781	S N 19 EFR 25 S	19	3/4"	25S - M36X200	39.0mm		46	90.0mm	0.38
078782	S N 25 EFR 25 S	25	1"	25S - M36X200	41.0mm		46	97.0mm	0.54
078783	S N 25 EFR 30 S	25	1"	30S - M42X200	42.0mm		50	98.0mm	0.48
078784	S N 32 EFR 30 S	32	1"1/4	30S - M42X200	43.0mm		50	109.0mm	0.95
078785	S N 32 EFR 38 S	32	1"1/4	38S - M52X200	48.0mm		60	115.0mm	1.15
078786	S N 38 EFR 38 S	38	1"1/2	38S - M52X200	51.0mm		60	133.0mm	0