


Embout sans dénudage femelle 90° série S

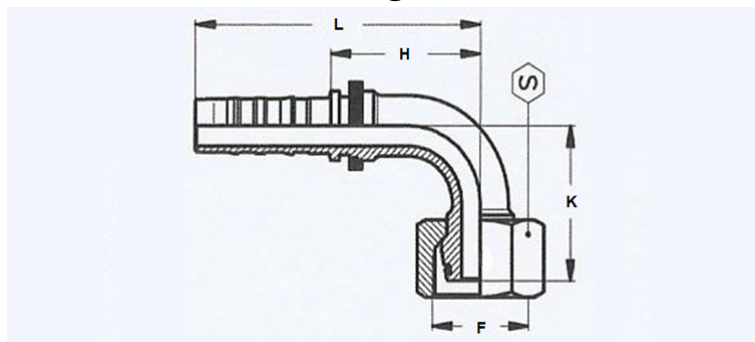

DKOS 90° - CONE 24° - SERIE LOURDE AVEC JOINT POUR TUYAU 4SP-4SH-R13-R15

Matière : Acier
Montage: Sans dénudage
Norme: ISO 8434-1 (DIN 2353)

Code	Référence	Diamètre tuyau (mm)	Diamètre tuyau (pouce)	F	H (mm)	K (mm)	S / E (mm)	L	Poids
078830	S N 19 EFR 20 S 90°	19	3/4"	30S - M30X200	55.0mm	55.0mm	36	106.0mm	0.437
078831	S N 19 EFR 25 S 90°	19	3/4"	25S - M36X200	55.0mm	55.0mm	46	106.0mm	0.474
078832	S N 25 EFR 25 S 90°	25	1"	25S - M36X200	71.0mm	69.0mm	46	128.0mm	0.738
078833	S N 25 EFR 30 S 90°	25	1"	30S - M42X200	71.0mm	50.0mm	50	128.0mm	0.724
078834	S N 32 EFR 30 S 90°	32	1"1/4	30S - M42X200	87.0mm	83.0mm	50	154.0mm	0
078836	S N 32 EFR 38 S 90°	32	1"1/4	38S - M52X200	87.0mm	80.0mm	60	154.0mm	1.235
078837	S N 38 EFR 38 S 90°	38	1"1/2	38S - M52X200	105.0mm	100.0mm	60	188.0mm	0