


## Embout sans dénudage femelle 45° ORFS

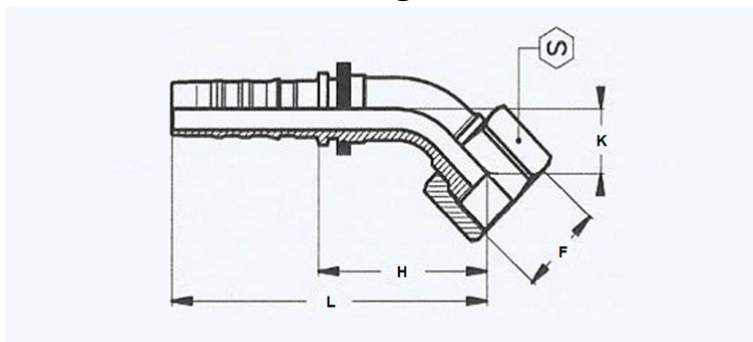

ORFS 45° - FOND PLAT POUR TUYAU 4SP-4SH-R13-R15

**Matière :** Acier  
**Montage:** Sans dénudage  
**Norme:** ISO 8434-3 (SAE J1453)

| Code   | Référence              | Diamètre tuyau (mm) | Diamètre tuyau (pouce) | F          | H (mm)      | K (mm)      | S / E (mm) | L       | Poids |
|--------|------------------------|---------------------|------------------------|------------|-------------|-------------|------------|---------|-------|
| 078863 | S N 19 JFP 1"3/16 45°  | 19                  | 3/4                    | 1"3/16-12  | 60.0mm      | 22.0mm      | 36         | 111.0mm | 0.368 |
| 078864 | S N 19 JFP 1"7/16 45°  | 19                  | 3/4                    | 1"7/16-12  | 61.0mm      | 23.0mm      | 41         | 112.0mm | 0.36  |
| 078865 | S N 25 JFP 1"7/16 45°  | 25                  | 1"                     | 1"7/16     | 78.0mm      | 29.0mm      | 41         | 134.0mm | 0.4   |
| 078866 | S N 25 JFP 1"11/16 45° | 25                  | 1"                     | 1"11/16-12 | 78.0mm      | 29.0mm      | 50         | 134.0mm | 0     |
| 078867 | S N 32 JFP 1"11/16 45° | 32                  | 1"1/4                  | 1"11/16-12 | 90.0mm      | 34.0mm      | 50         | 159.0mm | 0.889 |
| 079411 | S N 38 JFP 2" 45°      | 38                  | 1"1/2                  | 2"-12      | FABRICATION | SUR DEMANDE |            |         | 0     |