


Embout sans dénudage femelle 45° BSP

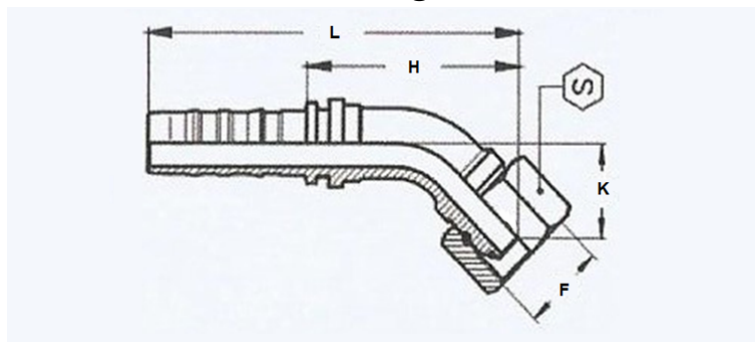

DKOR 45° - CONE 60° AVEC ECROU A JONC ET JOINT POUR TUYAU 4SP-4SH-R13-R15

Matière : Acier
Montage: Sans dénudage
Norme: ISO 8434-6 (BS 5200)

Code	Référence	Diamètre tuyau (mm)	Diamètre tuyau (pouce)	F	H (mm)	K (mm)	S / E (mm)	L	Poids
078744	S N 19 WFR 3/4 45°	19	3/4"	3/4"-14	67.0mm	29.0mm	32	118.0mm	0.39
078745	S N 19 WFR 1" 45°	19	3/4"	1"-11	70.0mm	32.0mm	41	121.0mm	0.38
078746	S N 25 WFR 1" 45°	25	1"	1"-11	86.0mm	36.0mm	41	142.0mm	0.5
078747	S N 25 WFR 1"1/4 45°	25	1"	1"1/4-11	87.0mm	37.0mm	50	143.0mm	0.65
078748	S N 32 WFR 1"1/4 45°	32	1"1/4	1"1/4-11	103.0mm	43.0mm	50	169.0mm	0.9
078749	S N 32 WFR 1"1/2 45°	32	1"1/4	1"1/2-11	FABRICATION	SUR DEMANDE			1
078750	S N 38 WFR 1"1/2 45°	38	1"1/2	1"1/2-11	123.0mm	51.0mm	60	208.0mm	1.67
079380	S N 50 WFR 2" 45°	50	2"	2"-11	160.0mm	65.0mm	75	257.0mm	0