


Te orientable renversé série L et S

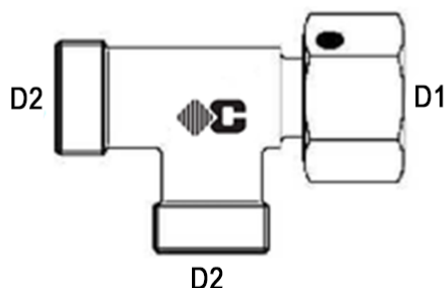

RACCORD DIN CONE 24°

Matière: acier

Norme: ISO 8434-1 (DIN 2353)

Type: 6046

Monobloc à jonc et joint coté femelle

Raccord livré nu, sans bague et sans écrou coté male

Code	Référence	D1	D2	D3	Pression (Bar)	Poids
SERIE L						
001642	31DL 6 NU	6L - M12X150	6L - M12X150		500	0.264
001643	31DL 8 NU	8L - M14X150	8L - M14X150		500	0.052
001644	31DL10 NU	10L - M16X150	10L - M16X150		500	0.067
001645	31DL12 NU	12L - M18X150	12L - M18X150		400	0.094
001646	31DL15 NU	15L - M22X150	15L - M22X150		400	0.208
001647	31DL18 NU	18L - M26X150	18L - M26X150		400	0.225
001648	31DL22 NU	22L - M30X200	22L - M30X200		250	0.281
001649	31DL28 NU	28L - M36X200	28L - M36X200		250	0.45
001650	31DL35 NU	35L - M45X200	35L - M45X200		250	0.68
001651	31DL42 NU	42L - M52X200	42L - M52X200		250	1.079
SERIE S						
001652	31DS 6 NU	6S - M14X150	6S - M14X150		800	0.064
001653	31DS 8 NU	8S - M16X150	8S - M16X150		800	0.079
001654	31DS10 NU	10S - M18X150	10S - M18X150		800	0.116
001655	31DS12 NU	12S - M20X150	12S - M20X150		630	0.137
001656	31DS14 NU	14S - M22X150	14S - M22X150		630	0.174
001657	31DS16 NU	16S - M24X150	16S - M24X150		630	0.124
001658	31DS20 NU	20S - M30X200	20S - M30X200		420	0.369
001659	31DS25 NU	25S - M36X200	25S - M36X200		420	0.701
001661	31DS30 NU	30S - M42X200	30S - M42X200		420	0.93
001662	31DS38 NU	38S - M52X200	38S - M52X200		420	1.384