


Embout à sertir male NPT (BRIGGS)

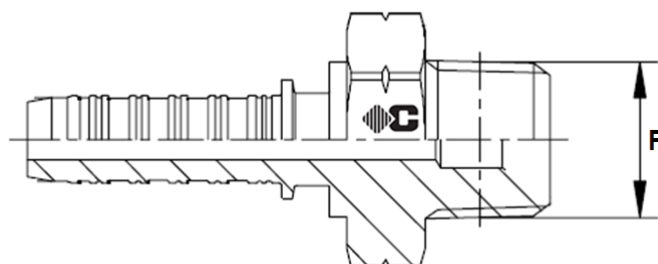

AGN - CONE 60°

Matière: Acier

Montage: Avec ou sans dénudage

Norme: ISO 8434-6 (BS 5200).

Code	Référence	Diamètre tuyau (mm)	Diamètre tuyau (pouce)	F (Filetage)	H (mm)	S (mm)	E (mm)	Poids
035528	S R 2 BM 1/8	2	1/12"	1/8 - 27				0.01
035529	S R 2 BM 1/4	2	1/12"	1/4 - 18				0.015
035530	S R 3 BM 1/8	3	1/8"	1/8 - 27				0.01
035531	S R 3 BM 1/4	3	1/8"	1/4 - 18				0.02
035532	S R 4 BM 1/8	4	5/32"	1/8 - 27				0.014
035533	S R 4 BM 1/4	4	5/32"	1/4 - 18				0.025
011353	S R 5 BM 1/8	5	3/16"	1/8 - 27				0.015
011352	S R 5 BM 1/4	5	3/16"	1/4 - 18				0.024
011395	S R 6 BM 1/8	6	1/4"	1/8 - 27				0.017
011394	S R 6 BM 1/4	6	1/4"	1/4 - 18				0.026
011396	S R 6 BM 3/8	6	1/4"	3/8 - 18				0.033
023759	S R 6 BM 1/2	6	1/4"	1/2 - 14				0.024
011527	S R 8 BM 1/4	8	5/16"	1/4 - 18				0.029
011528	S R 8 BM 3/8	8	5/16"	3/8 - 18				0.036
011526	S R 8 BM 1/2	8	5/16"	1/2 - 14				0.068
011651	S R 10 BM 1/4	10	3/8"	1/4 - 18				0.034
011652	S R 10 BM 3/8	10	3/8"	3/8 - 18				0.039
011650	S R 10 BM 1/2	10	3/8"	1/2 - 14				0.06
011796	S R 13 BM 3/8	13	1/2"	3/8 - 18				0.064
011794	S R 13 BM 1/2	13	1/2"	1/2 - 14				0.069
011795	S R 13 BM 3/4	13	1/2"	3/4 - 14				0.068
011966	S R 16 BM 1/2	16	5/8"	1/2 - 14				0.093
011967	S R 16 BM 3/4	16	5/8"	3/4 - 14				0.112
012101	S R 19 BM 3/4	19	3/4"	3/4 - 14				0.124
012100	S R 19 BM 1"	19	3/4"	1" - 11.5				0.204
012243	S R 25 BM 3/4	25	1"	3/4 - 14				0.164
012242	S R 25 BM 1"	25	1"	1" - 11.5				0.262
026110	S R 25 BM 1 1/4	25	1"	1 1/4 - 11.5				0.38
012357	S R 32 BM 1 1/4	32	1 1/4"	1 1/4 - 11.5				0.427
012447	S R 38 BM 1 1/2	38	1 1/2"	1 1/2 - 11.5				0.545
012509	S R 50 BM 2"	50	2"	2" - 11.5				0.878
077697	S R 76 BM 3"	76	3"	3" - 11				2.037