


Embout à sertir 90° femelle ORFS long

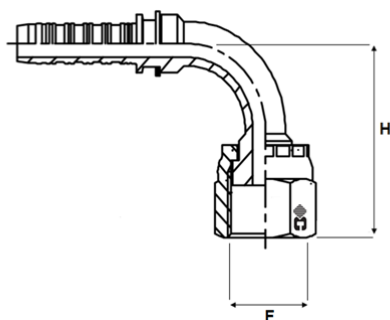

ORFS 90° - FOND PLAT - LONG

Matière: Acier

Montage: Avec ou sans dénudage

Norme: ISO 8434-3 (SAE J1453).

Code	Référence	Diamètre tuyau (mm)	Diamètre tuyau (pouce)	F (Filetage)	H (mm)	S (mm)	E (mm)	Poids
060792	S R 6 JFP 9/16 90° L46	6	1/4"	9/16 - 18	46mm			0.044
096089	S R 6 JFP 11/16 90° L38	6	1/4"	11/16 - 16	38mm			0.068
060793	S R 6 JFP 11/16 90° L54	6	1/4"	11/16 - 16	54mm			0.068
043249	S R 10 JFP 11/16 90° L54	10	3/8"	11/16 - 16	54mm			0.086
060588	S R 10 JFP 13/16 90° L64	10	3/8"	13/16 - 16	64mm			0.097
060586	S R 13 JFP 13/16 90° L64	13	1/2"	13/16 - 16	64mm			0.119
060794	S R 13 JFP 1" 90° L70	13	1/2"	1" - 14	70mm			0.175
060589	S R 16 JFP 1" 90° L70	16	5/8"	1" - 14	70mm			0.221
060590	S R 16 JFP 1 3/16 90° L96	16	5/8"	1 3/16 - 12	96mm			0.285
040789	S R 19 JFP 1 3/16 90° L96	19	3/4"	1 3/16 - 12	96mm			0.33
060787	S R 19 JFP 1 7/16 90° L118	19	3/4"	1 7/16 - 12	118mm			0.362
060795	S R 25 JFP 1 7/16 90° L114	25	1"	1 7/16 - 12	114mm			0.605
060796	S R 25 JFP 1 11/16 90° L129	25	1"	1 11/16 - 12	129mm			0.663
060788	S R 32 JFP 1 11/16 90° L129	32	1 1/4"	1 11/16 - 12	129mm			0.77
060797	S R 32 JFP 2" 90° L141	32	1 1/4"	2" - 12	141mm			0.962
060802	S R 38 JFP 2" 90° L141	38	1 1/2"	2" - 12	141mm			1.231